


Flexi Starter

FS O1

- Flexi series designed to protect the motor from fluctual voltage.
- It has Two different variants for both 1 Ph and 3 Ph
- Operating voltage range in - 1 Ph (90 V to 300V)
- Operating voltage range in - 3 Ph (270 V to 490V)



Features :

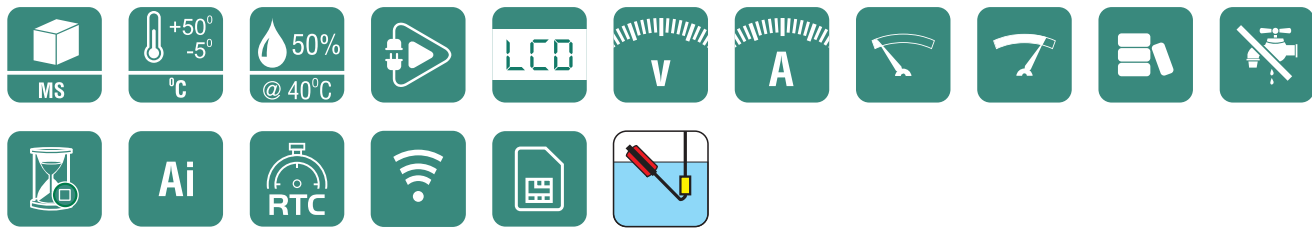

Technical Specifications :

V	Ord.Code	Power		Current	Distance	Controller Basic	GSM	Surge Suppressor
		kW	HP	Amps	Feet			
270V to 490V	E19.1901	5.5	7.5	14	Above 600 ft	—	✓	✓
	E19.1902	7.5	10	18				
	E19.1903	11	15	25				
	E19.1904	15	20	32				
	E19.1905	5.5	7.5	14	Above 600 ft	✓	—	✓
	E19.1906	7.5	10	18				
	E19.1907	11	15	25				
	E19.1908	15	20	32				
	E19.1909	5.5	7.5	14	Below 600 ft	—	✓	—
	E19.1910	7.5	10	18				
	E19.1911	11	15	25				
	E19.1912	15	20	32				
	E19.1913	5.5	7.5	14	Below 600 ft	✓	—	—
	E19.1914	7.5	10	18				
	E19.1915	11	15	25				
	E19.1916	15	20	32				